

Sinofibra Advanced Materials Co.,Ltd.

Product: Water-Blocking Aramid Yarn (Water-Swellable Aramid Strength Membr
Product Series: SF-WBA-Series
Product IDs: SF-WBA2840



PRODUCT DESCRIPTION

The SF-WBA-2840 is an aramid yarn treated with a superabsorbent water-swella system. It is intended for use as a dielectric strength member in optical fiber cables, providing both mechanical reinforcement and dry water-blocking functionality.

APPLICATIONS

- Dielectric strength member for optical fiber cables
- Dry (gel-free) water-blocking cable designs
- Replacement or reduction of water-blocking tapes and filling gels

KEY FEATURES

- High tensile strength
- Outstanding flexibility
- Outstanding impact and fatigue resistance
- Excellent water-absorbing ability


PHYSICAL & MECHANICAL PROPERTIES

Standard laboratory conditions (unless otherwise stated): 23 ± 2 °C, 50 ± 10 % RH.

Property	Unit	Test Standard	Nom.	Min.	Max.	Specification
Linear Density	Dtex	ASTM D1907	3357	3248	3472	3248–3472
Break Strength	N	ASTM D885	600	530	—	≥530
Elongation at Break	%	ASTM D885	2.5	2.0	3.0	2.0–3.0
Modulus	Gpa	ASTM D885	—	112.0	—	≥112
LASE 0.3%	N	ASTM D885	61	50	—	≥50
LASE 0.5%	N	ASTM D885	120	100	—	≥100
LASE 1.0%	N	ASTM D885	230	210	—	≥210
Absorption Capacity	g/g	Internal method SF22-12-01	15.0	8.0	—	≥8.0

LASE definition (for clarity): Load at specified elongation (strain) during tensile test.

PACKAGING

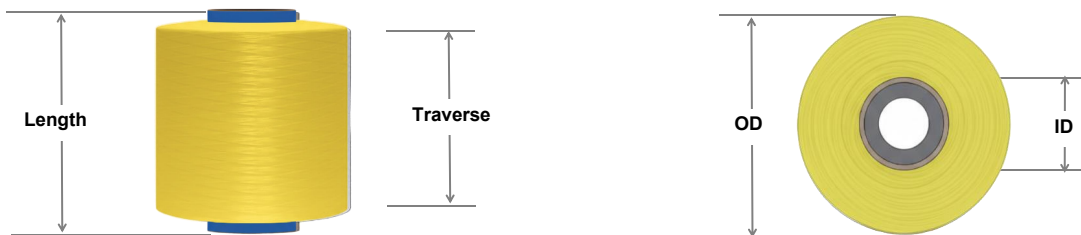

Tube Specs	ID	Length	Traverse	Max. OD	Surface Finish
SF94x216	94mm	216mm	185mm	270mm	rough
SF94x290	94mm	290mm	250mm	270mm	rough

STORAGE & HANDLING

Storage: Keep in original sealed packaging in a clean, dry, and well-ventilated area.

Conditions: Temperature ≤ 30 °C, Relative Humidity (RH) ≤ 65%.

Compliance: RoHS and REACH compliant; free of hazardous substances.

DISCLAIMER

The information in this TDS is based on laboratory measurements and is provided for product selection and specification development. Actual performance may vary with cable design, processing conditions, and environmental factors. Users are responsible for determining suitability for the intended application.

Sinofibra Advanced Materials Co.,Ltd.

Address: Kangtai Chuangxin Plaza, No.222, Kefa Road, Shenzhen, China

info@sinofibra.com | www.sinofibra.com